

**Luminaire**


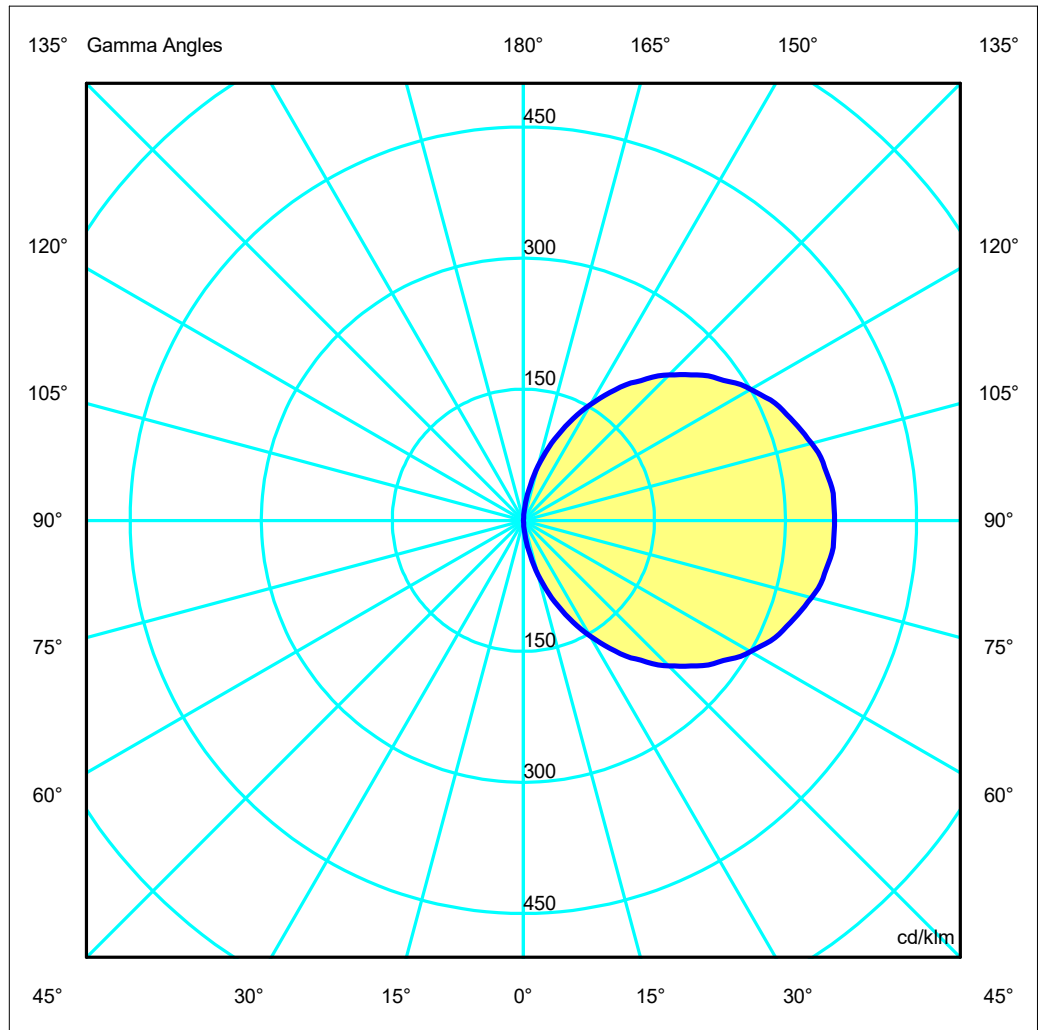
Code DK01WW+ DK01DM AL / DK01CN SS  
Name XDECK

**Measur.**

Code DK01WW+ DK01DM AL / DK01CN SS  
Name XDECK

Luminaire Flux	118.94 lm	Luminaire Power	2.00 W	Efficacy	59.47 lm/W	Efficiency	99.95%
Lamps Flux	119.00 lm	Maximum value	355.88 cd/klm	Position	C=85.00 G=90.00	CG Sym. on planes 270-90	
Rectangular Luminaire Rectangular Luminous Area	Length Length	1 mm 0 mm	Width Width	1 mm 0 mm	Height Height	1 mm 1 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000000 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000000 m2			
Coordinate system Date Measurement Distance	CG 26-10-2021 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux		Sym. on planes 270-90 180 119.00 lm			
Operator Temperature Humidity Notes	25.00 °C 60.00 %	Source Voltage [V] Source current [A] Photocell					

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		DK01WW+ DK01DM AL		Name XDECK - 2.00 W		119.00	2.00	1
C.I.E.	12 37 67 50 100			D DIN 5040	C11			
F UTE	--			B NBN	BZ 10			


ULOR 49.98 %  
DLOR 49.98 %  
RN 50.00 %


**Luminaire**

Code DK01WW+ DK01DM AL / DK01CN SS  
 Name XDECK

**Measurement**

Code DK01WW+ DK01DM AL / DK01CN SS  
 Name XDECK

Luminaire Flux	118.94 lm	Luminaire Power	2.00 W	Efficacy	59.47 lm/W	Efficiency	99.95%
Lamps Flux	119.00 lm	Maximum value	355.88 cd/klm	Position	C=85.00 G=90.00	CG Sym. on planes 270-90	

