

Luminaire


 Code FO04WW30
 Name XFLOW

Measurement

 Code FO04WW30
 Name XFLOW

Luminaire Flux	405.53 lm	Luminaire Power	6.00 W	Efficacy	67.59 lm/W	Efficiency	98.67%
Lamps Flux	411.00 lm	Maximum value	4898.81 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	250 mm	Width	50 mm	Height	10 mm
Rectangular Luminous Area		Length	250 mm	Width	50 mm	Height	10 mm
Horizontal Luminous Area		0.012500 m2		Emitting area on Plane 180°		0.002500 m2	
Emitting area on Plane 0°		0.002500 m2		Emitting area on Plane 270°		0.000500 m2	
Emitting area on Plane 90°		0.000500 m2		Glare area at 76°		0.005450 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		10-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		411.00 lm	
Operator				Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	FO04WW30	XFLOW	411.00	6.00	1	
C.I.E.	95 99 100 100 99	D DIN 5040	A60			
F UTE	0.99 A	B NBN	BZ 1			



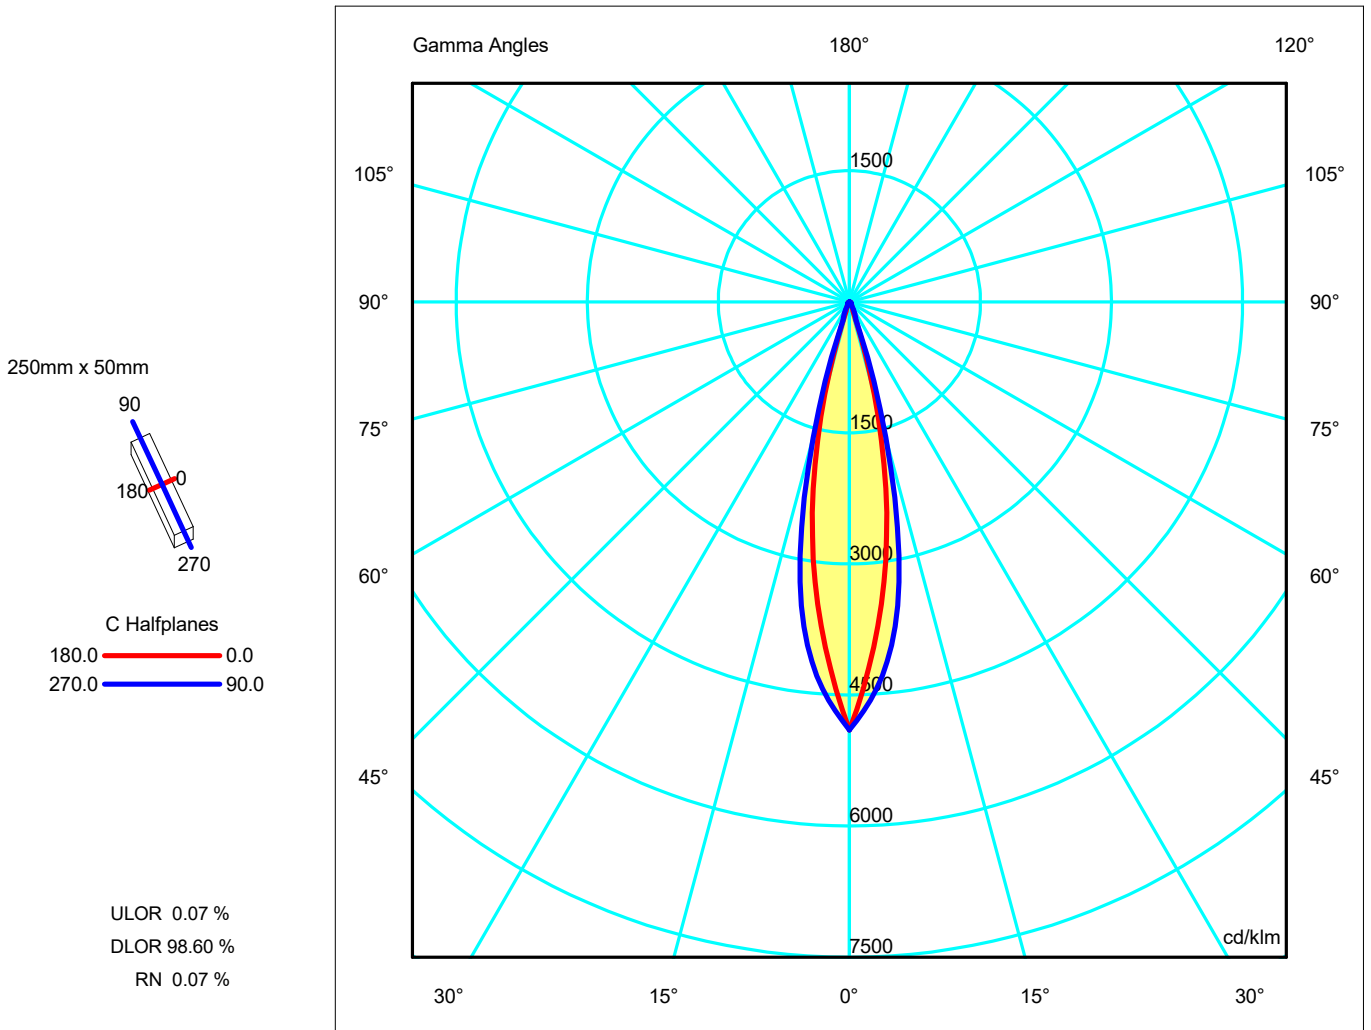


Luminaire
 Code FO04WW30
 Name XFLOW
Measur.
 Code FO04WW30
 Name XFLOW

Luminaire Flux	405.53 lm	Luminaire Power	6.00 W	Efficacy	67.59 lm/W	Efficiency	98.67%
Lamps Flux	411.00 lm	Maximum value	4898.81 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

250mm x 50mm

C Halfplanes

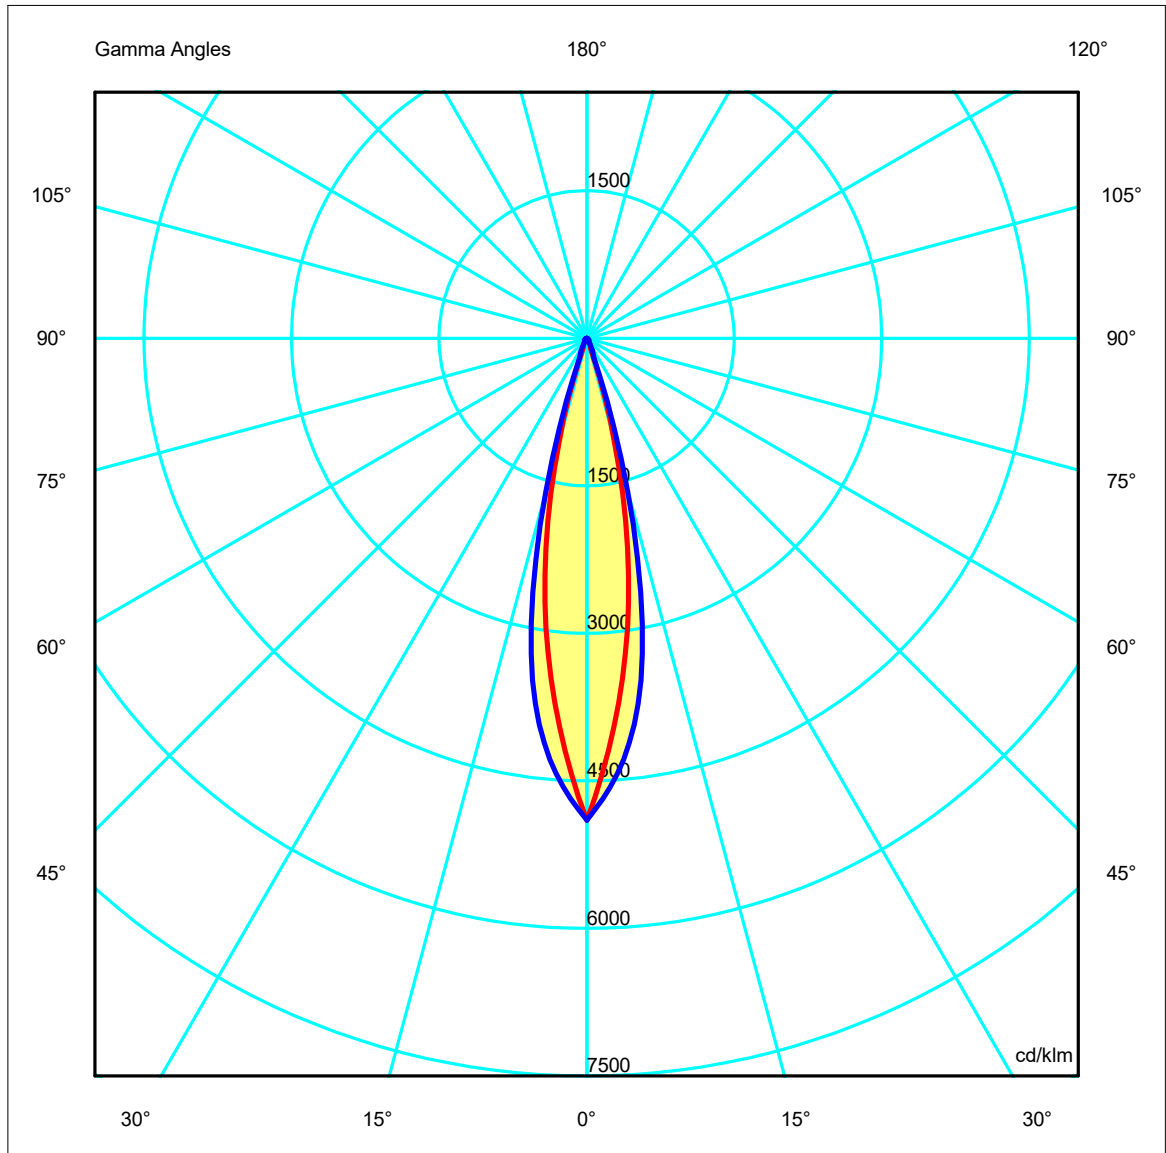

Luminaire

Code FO04WW30
Name XFLOW

Measurement

Code FO04WW30
Name XFLOW

Luminaire Flux	405.53 lm	Luminaire Power	6.00 W	Efficacy	67.59 lm/W	Efficiency	98.67%
Lamps Flux	411.00 lm	Maximum value	4898.81 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	4.4	5.1	4.6	5.3	5.9	4.8	5.5	5.0	5.7	5.9
x=2H y=3H	4.7	5.3	5.0	5.6	6.3	5.2	5.8	5.5	6.1	6.3
x=2H y=4H	4.8	5.3	5.1	5.6	6.4	5.3	5.9	5.6	6.1	6.4
x=2H y=6H	4.7	5.3	5.0	5.5	6.4	5.3	5.8	5.6	6.1	6.4
x=2H y=8H	4.7	5.2	5.0	5.5	6.3	5.2	5.7	5.5	6.0	6.3
x=2H y=12H	4.6	5.1	5.0	5.4	6.3	5.2	5.7	5.5	6.0	6.3
x=4H y=2H	4.7	5.3	5.0	5.6	6.2	5.1	5.7	5.4	5.9	6.2
x=4H y=3H	5.1	5.6	5.5	5.9	6.6	5.5	6.0	5.9	6.3	6.6
x=4H y=4H	5.2	5.6	5.6	5.9	6.7	5.6	6.1	6.0	6.4	6.7
x=4H y=6H	5.2	5.5	5.6	5.9	6.7	5.6	6.0	6.0	6.4	6.7
x=4H y=8H	5.1	5.4	5.5	5.8	6.7	5.6	5.9	6.0	6.3	6.7
x=4H y=12H	5.1	5.3	5.5	5.7	6.6	5.6	5.8	6.0	6.2	6.6
x=8H y=4H	5.2	5.5	5.6	5.9	6.7	5.6	5.9	6.0	6.3	6.7
x=8H y=6H	5.1	5.3	5.6	5.8	6.7	5.6	5.8	6.0	6.2	6.7
x=8H y=8H	5.1	5.3	5.5	5.7	6.7	5.5	5.7	6.0	6.2	6.7
x=8H y=12H	5.0	5.2	5.5	5.6	6.6	5.5	5.7	6.0	6.1	6.6
x=12H y=4H	5.1	5.4	5.6	5.8	6.6	5.6	5.8	6.0	6.2	6.6
x=12H y=6H	5.1	5.3	5.5	5.7	6.6	5.5	5.7	6.0	6.2	6.6
x=12H y=8H	5.0	5.2	5.5	5.6	6.6	5.5	5.7	6.0	6.1	6.6